

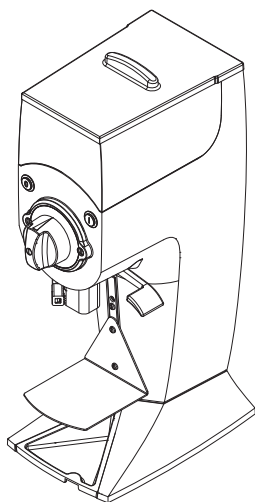


GUATEMALA | GUATEMALA SB

INSTRUCTION MANUAL

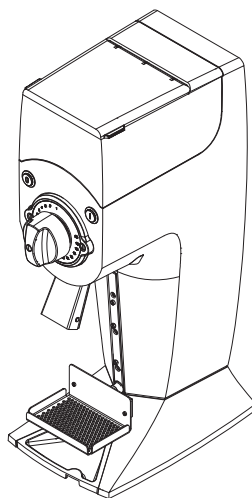


GUATEMALA

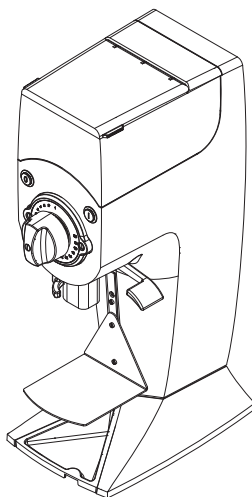

GUATEMALA SB



Overview

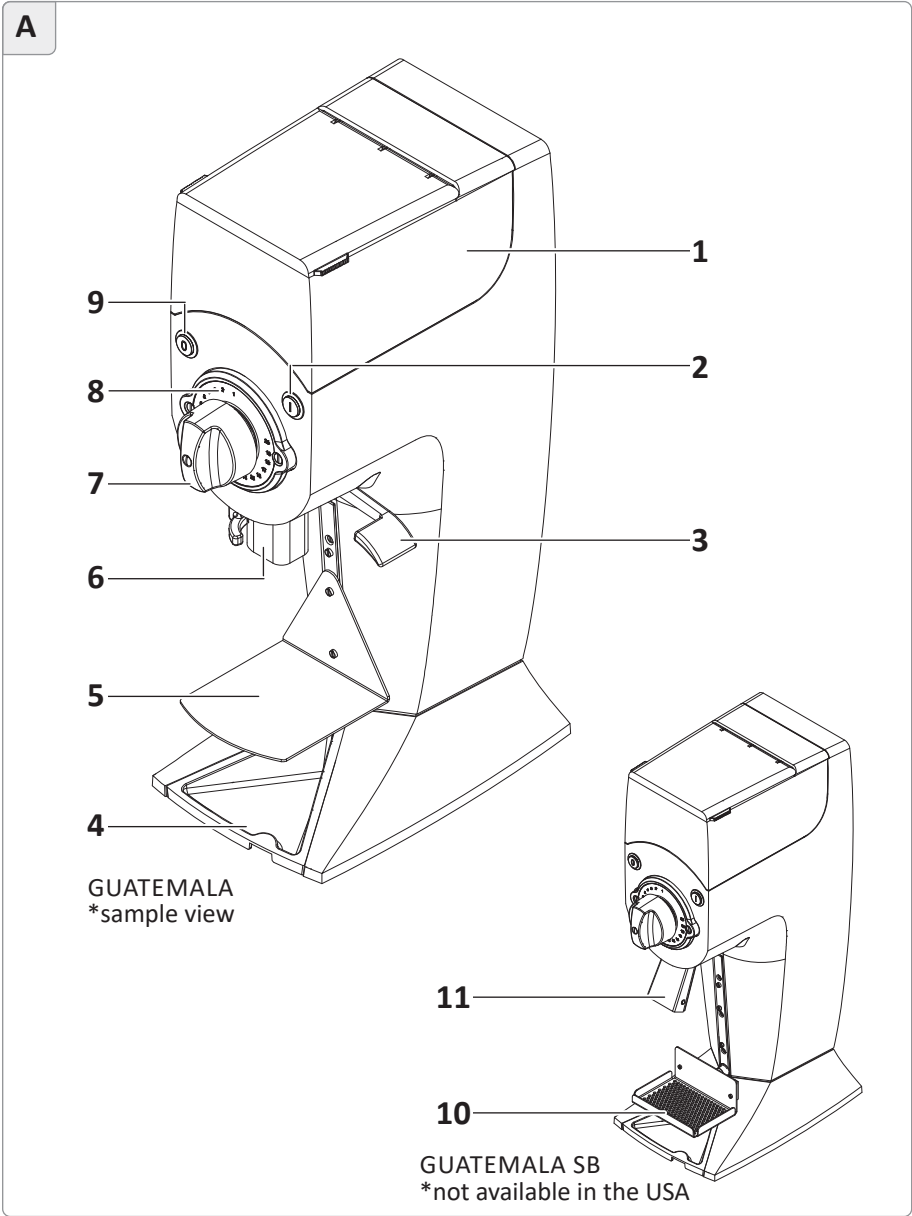

Technical data

Model:	Guatemala Guatemala SB
Voltage / frequency:	100 V; 50/60 Hz 110–127 V; 60 Hz 220–240 V; 50/60 Hz
Protection type:	IPX1
Protection class:	I 
Fuse:	16 A-slow
Idle speed:	
50 Hz:	2850 rpm
60 Hz:	3400 rpm
Sound emission values (during grinding):	85 dBA
Grinding capacity (fine—coarse):	15 g/s*
Max. permitted operating cycle:	40 min. on/100 min. off
Dimensions (W × D × H):	220 × 330 × 620 mm
Weight (net):	28 kg
Max. funnel fill amount:	1000 g

*Depending on the espresso bean type selected, the grinding degree selected, and the mains frequency.